



hushfree



hushoffice

feel
free

to **talk** to **meet** to **work**

**FEEL FREE
TO CHOOSE
WHERE
AND HOW
YOU WORK!**

feel
free
to **talk** to **meet** to **work**

WHY ARE WE INTRODUCING THE NEW HUSHFREE ACOUSTIC PODS LINE?

The new hushFree line of acoustic solutions was developed as the most premium option in the Hushoffice product portfolio. The improvements have been developed based on extensive customer feedback on our already popular product range.

THE ENHANCEMENTS FOCUSED ON 5 KEY AREAS:



INCREDIBLE ACOUSTIC COMFORT

Development of excellent **Class A** acoustic comfort in accordance with the ISO 23351-1:2020 standard for acoustic office booths and situations that require highest level of speech privacy (except hushFree.XM and hushFree.Access models which are class B).

Despite maintaining a similar exterior profile to the Hush Classic range of pods, hushFree includes a completely redeveloped interior construction. This construction is critical in raising the performance level of the hushFree pods.

INCREASING CERTIFICATIONS BASED ON SPECIFIC MARKET AND CUSTOMER NEEDS.

The new interior construction allows hushFree to meet the **GreenGuard Gold** emission standards without compromising the fire safety of the internal construction.

By using Athlon Plus from Gabriel, it is possible to specify matching fabric finishes on both wall and furniture elements in hushFree range.

STANDARDS COMPLIANCE FOR HUSHOFFICE ACOUSTIC PODS

Standard	Certificate	Test report	Declaration	Manufacturer statement
Acoustics ISO 23351-1:2020		•		•
ASHRAE 111 Section 7 (airflow)*		•		•
BIFMA Level 1	•			
CARB 2			•	
CE		•	•	
Certified Autism Resource	•			
EPA TSCA Title VI			•	
EPD/LCA ²			•	
Flammability California Technical Bulletin 117		•		•
Flammability EN 1021-1:2014		•		•
Flammability EN 1021-2:2014		•		•
Greenguard Gold	•	•		
Mechanical resistance ANSI/BIFMA		•		•
PEFC	•			
Proposition 65 list		•		•
Safety GS mark ²	•	•		
Safety UL Listed	•	•		•
Seismic design		•		
SGCC Safety Glass	•			•



*1. Available for hushFree.S, hushFree.M and hushFree.Access.M

2. Except hushFree.XS and hushFree.S.Hybrid


WHY ARE WE INTRODUCING THE NEW HUSHFREE ACOUSTIC PODS LINE?

INTRODUCTION OF IMPROVED TECHNOLOGY FEATURES TO THE PRODUCT - BETTER LIGHTING, ENHANCED VENTILATION, HUSHASSISTANT AND OCCUPANCY SIGNAL.



The **new LED lighting** system in the both provides light with a temperature of 4000 K (adjusted in the range of 2200 - 6500K) and an intensity of 500 lux at desk level.

This follows the requirement of several international standards* to ensure that the light level is appropriate for working without causing additional eye strain.

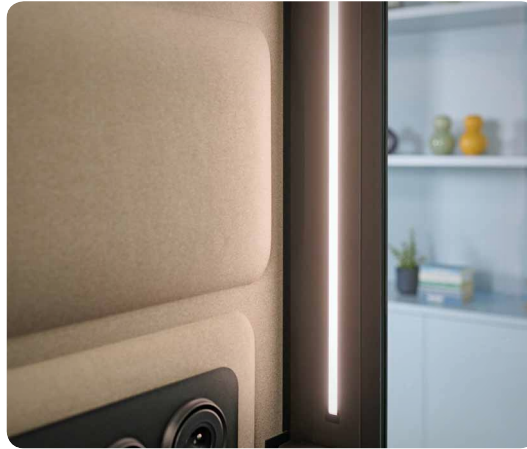

Importantly, one person pods have a system of additional side LED lighting with adjustable intensity, so that the user's face is even better illuminated during longer videoconferences.



The **ventilation** in hushFree has been redesigned to ensure airflow is delivered where the user expects. The updated ventilation system is now able to refresh the air in the hushFree pods quicker than with the previous generation.

The ventilation will overrun once the pod is emptied to ensure the air is refreshed before the next user. The fans are specified to ensure both speech privacy is preserved and that ambient noise within the pod is kept to a minimum.

*ISO 8995-1:2002 (CIE S 008/E:2001) and European Union standard: EN 12464-1:2021


WHY ARE WE INTRODUCING THE NEW HUSHFREE ACOUSTIC PODS LINE?

INTRODUCTION OF IMPROVED TECHNOLOGY FEATURES TO THE PRODUCT - BETTER LIGHTING, ENHANCED VENTILATION, HUSHASSISTANT AND OCCUPANCY SIGNAL.

Importantly none of the technology in our pods is used to collect any information regarding the user or usage of the pods.



HushAssistant is an innovative booth managing system with a 4-inch round, high-resolution touchscreen. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.

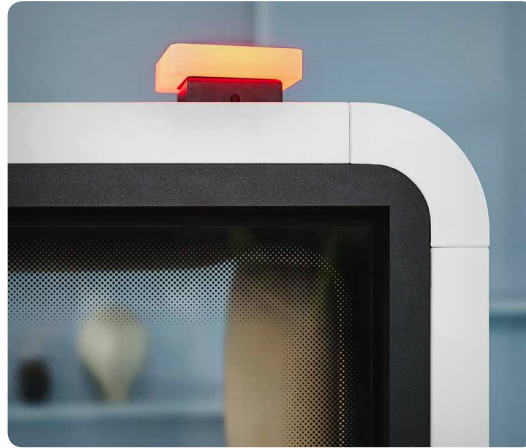

All of the hushFree pods are able to be equipped with our **occupancy** beacon, which provides a simple and clear way to identify when a pod is occupied. Following our philosophy of maximising flexibility in hushFree the customer is free to choose the quantity and placement of the beacon(s) ensuring best placement to suit the space which the pods are used.



NEURODIVERSITY - WE SUPPORT TEAMS COMMITTED TO INTEGRATION

The cabin is CAR (Certified Autism Resource) certified – it creates a work environment that accommodates the needs of neurodivergent individuals in terms of work organization, space, communication, and perception.

WHY ARE WE INTRODUCING HUSHASSISTANT?

hushAssistant

At the core of the user-centred design philosophy in the hushFree pods is the new hushAssistant control module.

Featuring a simple and intuitive touch screen; light color and intensity, airflow intensity, and pod reservation can be simply adjusted with a few swipes of one finger.

All settings can be adjusted to the user's precise requirements, or quickly adjusted using one of the five ready built user settings: Auto, Focus, Relax, Video Call and Default.

The reservation system supports quick ad-hoc bookings from within the pod, for those important meetings. Or reservations can be planned into the reservation system remotely using Microsoft Exchange enabled devices.

Handy reminders will inform users when they should take a coffee break and rest in order to maintain optimal productivity in a working day.


This is a solution that ensures HushFree not only provides acoustical privacy, but also supports employee comfort and performance.

A specially prepared DEMO mode will guide each user through the functionalities available as part of the hushAssistant option.




WHY ARE WE INTRODUCING HUSHASSISTANT?

Feel **free** to set **your mood**

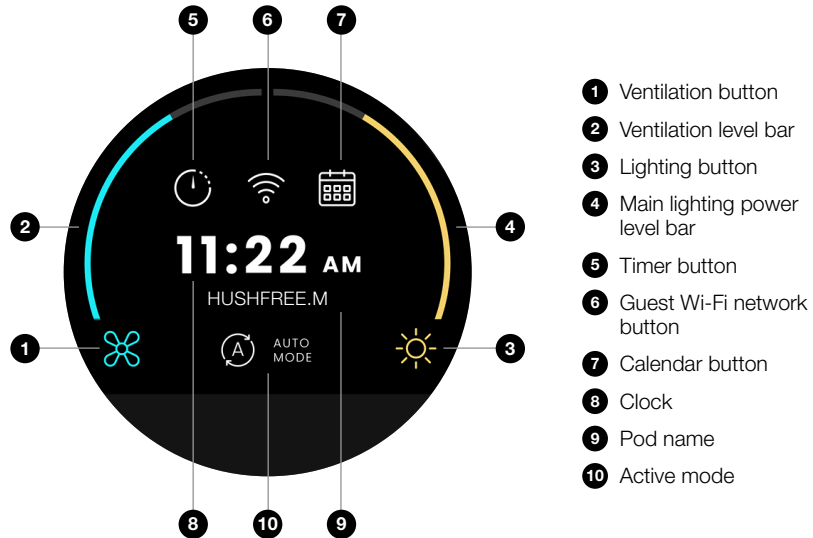

Mode selection

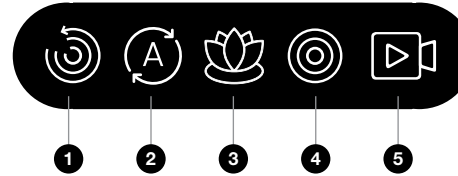

- 1 Default mode
- 2 Automatic mode
- 3 Relax mode
- 4 Focus mode
- 5 Video Call mode (optional for one person pods)

Each mode has programmed values for lighting and ventilation levels:

	Ventilation	Main lighting power	Main lighting colour	Side lighting
DEFAULT	100%	User settings	User settings	0%
AUTO	100%	50% - 100%	2700K - 6500K	0%
RELAX	100%	70%	2800K	0%
FOCUS	100%	90%	6500K	0%
VIDEO CALL	100%	60%	4000K	100%

In **DEFAULT** mode, the main lighting power and color values are taken from the user-selected settings. **AUTO** mode adjusts lighting according to a person's circadian rhythm (a person's internal human clock) adjusting the color temperature and light intensity by time to follow the typical lighting conditions of the day and providing a more comfortable environment and a better connection to the outside world.

BOOKING FUNCTIONS

AUTO MODE

The Auto mode is based on the circadian rhythm of the sun, dynamically adjusting the brightness and color temperature of the lighting according to the time of day to provide the most natural working conditions for the user. As with natural light, the color temperature and intensity of the light emitted gradually increases from the morning, reaching a maximum of around midday, helping to stimulate the body to act and move into a state of full activity and concentration. Then, until the evening, the brightness of the light begins to gradually decrease and the color of the light becomes warmer, helping to reduce stress and gently transition from a state of activity to rest. Everything happens automatically and entirely according to the circadian cycle.



BOOKING FUNCTIONS

HushAssistant supports quick ad hoc bookings that can be made in the pod itself.


This ensures seamless access to a quiet workspace whenever needed, enhancing productivity and minimizing disruptions. The ease of booking also optimizes pod utilization, making collaboration and focused work more efficient.



BOOKING FUNCTIONS

CALENDAR

The calendar screen displays a schedule of available and occupied pod slots for 3 hours ahead. Slots are booked using the Microsoft 365 Business platform. Using the ❸ and ❹ buttons, you can scroll the calendar forward and backwards on the timeline.

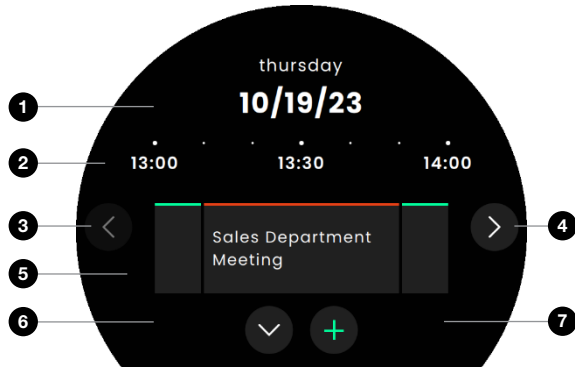

Description of the elements on the meeting details screen:


- ❶ Current date
- ❷ Timeline
- ❸ Scroll back button
- ❹ Scroll forward button
- ❺ Appointments view
- ❻ Exit screen button
- ❼ Ad hoc booking button

BOOKING FUNCTIONS

MEETING DETAILS

The meeting details screen displays information about the occupied cabin slot. The information includes the meeting date (start and end times), topic, and the list of participants. For meetings created using the quick booking method, the list of participants will be empty.

The option to delete a meeting is only available for a slot reserved using the ad hoc booking method.

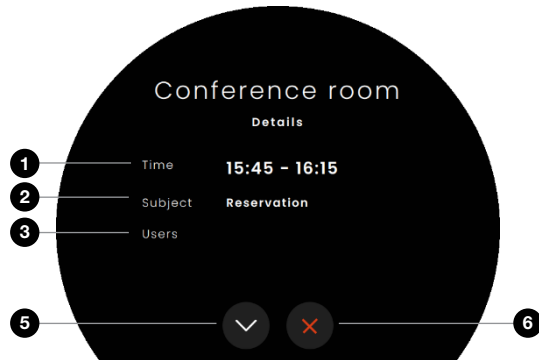

Description of the elements on the meeting details screen:

- 1 Meeting date
- 2 Meeting subject
- 3 Meeting participants
- 4 Exit screen button
- 5 Delete meeting button

After clicking the delete meeting button, the application displays a message asking you to confirm the operation.

BOOKING FUNCTIONS

TIMER



TIMER FOSTERING BETTER WORK MANAGEMENT

HushAssistant is delivered with the built-in timer which helps users manage their work sessions effectively by setting time limits for focused tasks. This feature promotes a better time management, encourages productivity, and prevents overextended use of the space. By keeping track of time, users can maintain a balanced workflow, take necessary breaks, and ensure fair availability of the pod for others. It's a simple yet powerful tool for optimizing the concentration and efficiency.

COFFEE TIME



COFFEE TIME REMINDER FOR IMPROVED PRODUCTIVITY AND WELL-BEING

The Coffee Time Reminder feature gently prompts users to take regular breaks, helping them maintain focus and well-being throughout the day. Short pauses improve productivity, reduce mental fatigue, and enhance overall work efficiency. By encouraging a healthy balance between deep work and rest, this feature supports both concentration and long-term performance. It's a simple way to stay refreshed and make the most of every work session. The user can skip Coffee break reminders or disable them through the device administrator in the settings.

DEMO



DEMO MODE FOR GETTING THE MOST OUT OF THE POD

The hushAssistant's Demo mode feature allows users to explore available functionalities without making permanent adjustments. This model provides a guided overview of key features such as lighting, ventilation, and booking options, helping users and, e.g., Facility Managers understand how to optimize their experience and use the pod correctly. It's an excellent tool for demonstrations, training sessions, or testing different settings before regular use.


WHY ARE WE INTRODUCING THE NEW HUSHFREE ACOUSTIC PODS LINE?

INCREASING FLEXIBILITY OF SPECIFICATION OF PODS TO SUPPORT MULTIPLE USE CASES.

A key intent in the design of the hushFree range was to ensure a high level of flexibility support the many differing applications of an acoustic pod in an office space, integrated controls mean that all hushFree pods can be operated without Hushoffice furniture inside.

We offer a range of different configurations of pod from empty (for your own choice of furniture) to include sofas or traditional conference table elements. Mounting points are integrated into the columns (S.Hybrid,M and L models) to support displays or other accessories. Finally, hushFree includes up to 8 outlets (depending on model) to be individually specified from power, USB A+C, HDMI and LAN ensuring that the pod supports your application.

In addition, the new hushFree acoustic panels can be specified in 8 timeless colours, supporting design freedom or zoning.

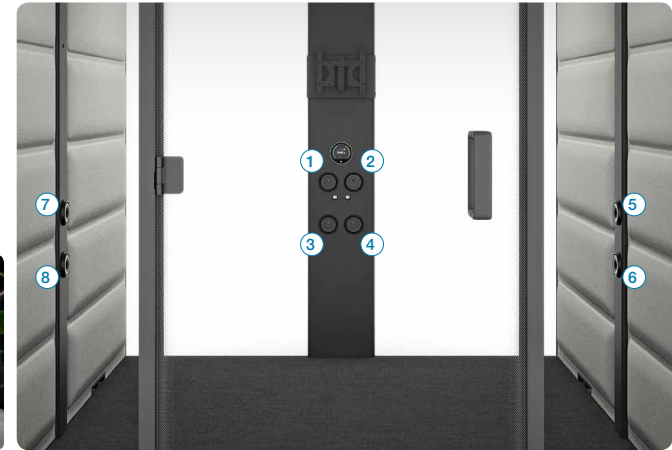

FREEDOM & FLEXIBILITY

FEEL THE **FREEDOM** OF CHOOSING A LOCATION

ENJOY THE **FLEXIBILITY** TO CONFIGURE HOW YOU'D LIKE

- Integrated castors
- Always prepared for connection of sprinklers and smoke detector
- Provision for seismic anchoring included as standard
- Door opening limiter to a maximum angle of 130°

Have the freedom to choose where and how you work. Design each pod as you like, according to your needs and preferences. From empty to equipped with ready-made Hushoffice furniture



MOBILITY - FREEDOM OF MOVEMENT

All HushFree models, except Access versions, are equipped with integrated castors, so you can move them freely within your office space without having to disassemble them. You can create and reorganise flexible office spaces yourself, adapted to the needs of your enterprise and your employees, without the necessity of renovation or installation work.



hushfree.XS



hushfree.S
hushfree.S.Hybrid



hushfree.XM




hushfree.M



hushfree.L

UNIFIED HEIGHT

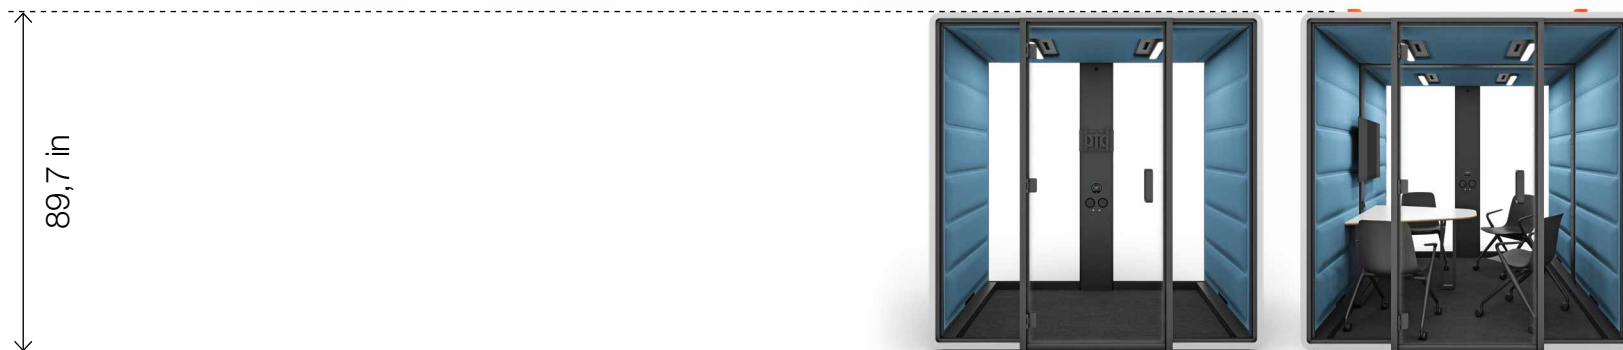


SPRINKLER AND SMOKE DETECTOR MOUNTING PREPARATION




SPRINKLER PREPARATION


- Sprinklers and Alarm Signaling
- There are access cut outs at the top of the pods that can be removed to accommodate sprinkler access or fire suppression kits




hushFree.XS




hushFree.XM



hushFree.S / hushFree.S.Hybrid

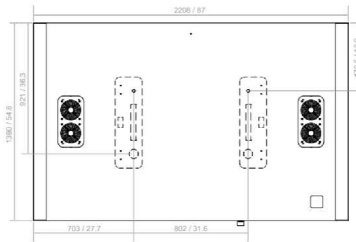

hushFree.M / hushFree.Access.M

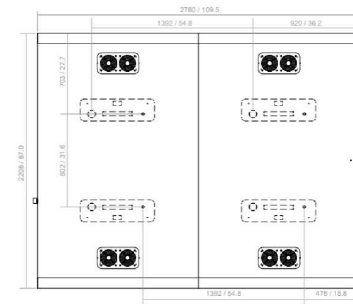


hushFree.L / hushFree.Access.L


Technical drawing of a rectangular plate with rounded corners, showing a perspective view and a detailed dimensioned view.

Dimensioned View Details:

- Overall Dimensions:** 640 / 25.2 (Length) x 190 / 7.5 (Width).
- Top Edge:** 320 / 12.6 (Distance from left edge to center of top slot).
- Left Edge:** 137 / 5.4 (Total height), 60 / 2.4 (Height of top rounded corner).
- Right Edge:** 33 / 1.3 (Height of bottom rounded corner).
- Internal Features and Dimensions:**
 - Top Slot:** 285 / 11.2 (Length), 120 / 4.7 (Width), 100 / 3.9 (Distance from left edge to start of slot).
 - Holes:**
 - Top Left: $\varnothing 35 / 1.4$
 - Top Center: $\varnothing 28.5 / 1.1$
 - Top Right: $\varnothing 35 / 1.4$
 - Bottom Left: $\varnothing 35 / 1.4$
 - Bottom Center: $\varnothing 35 / 1.4$
 - Bottom Right: $\varnothing 35 / 1.4$
 - Bottom Edge:** 120 / 4.7 (Distance from left edge to center of bottom slot), 70 / 2.7 (Width of bottom slot).
 - Other Dimensions:** 100 / 3.9 (Distance from left edge to center of top hole), 100 / 3.9 (Distance from right edge to center of top hole).

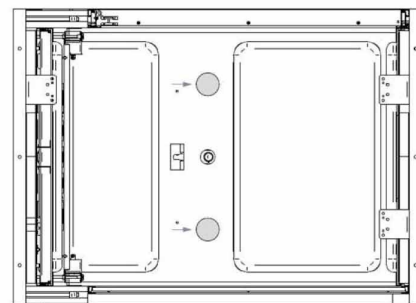

MIN 60 / 2.362
MAX 70 / 2.755

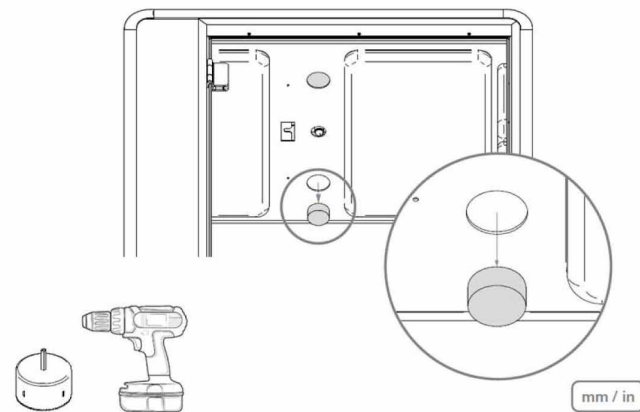

WHY ARE WE INTRODUCING THE NEW HUSHFREE ACOUSTIC PODS LINE?

ADDING WHEELCHAIR-ACCESSIBLE OPTIONS FOR MULTI-USER PODS.

In addition to the traditional construction of pods with a raised floor to provide the highest level of acoustic insulation from the environment

hushFree also includes a without floor accessible option for both the M and L models, hushFree.Access.M and hushFree.Access.L respectively.

The zero threshold approach allows them to be accessible to wheelchair users.

Added to the complete flexibility to add and remove furniture from hushFree means that these pods can be customized to the needs of many users varied needs.

Although hushFree.Access.M and L support ease of access for wheelchair users or users with motor disabilities, there are many aspect that need to be considered in making a pod fully accessible.

It is important to inform our customers of all the considerations for inclusive design:

Furniture selected should allow access for users of differing needs, including space to allow wheelchairs users to enter and exit without assistance.

Door opening and environmental controls (ventilation, lighting) should be possible by users with mobility or hand-function disabilities.

Ambient conditions within the pod should be easily adjustable to support users with hypersensitivity or similar neurodiverse requirements.

Muted textures and colours should also be considered to avoid over stimulation.



BARRIER FREE DESIGN

HUSHFREE SUPPORTS **DIVERSE TEAMS** WITH UNIQUE CONTROLS & **EASIER ACCESS**

- **Zero-threshold**
- **Adjustable light color temperature allowing Neurodiverse work conditions**
- **Control panel via hushAssistant**

HushFree creates a working environment that considers the needs of people and neurodiversity needs. Create friendly working environments by reducing barriers and stimulating the strengths for everyone.




ADA COMPLIANCE

The Americans with Disabilities Act (ADA) of 1990 is a civil rights law in the United States that prohibits discrimination based on disability. Because of its status as law, compliance is not optional. Municipalities do not have to adopt ADA in the way they adopt other building codes; it is already mandatory. The most recent version of the design standards for public spaces was released by the Justice Department in 2010 and it is what designers follow today.

Basic source of ADA compliance information:

- **2010 ADA Standards for Accessible Design**
- **U.S. ACCESS BOARD TECHNICAL GUIDE** for accessible design of operable parts

Clear floor space

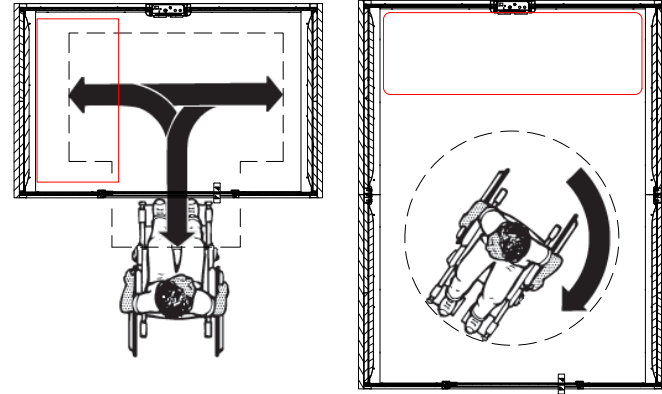

At most elements, clear floor space can be positioned for either a forward approach or a side approach. A forward approach is required at some elements, such as drinking fountains and lavatories, for easier access. Nominal centering of the space on operable portions of elements is advisable, but not required (except at washers and dryers).


Clear floor space for forward approaches must extend up to or, if knee or toe space is provided, below operable parts. This facilitates access since the forward reach does not extend beyond a wheelchair user's toes.

If clear floor space is obstructed on both sides more than half the minimum required depth, a wider clearance (36" minimum) is required for maneuvering and sway.

ADA COMPLIANCE

304.3.1 CIRCULAR SPACE


The turning space shall be a space of 60 in (1525 mm) diameter minimum. The space shall be permitted to include knee and toe clearance complying with 306.

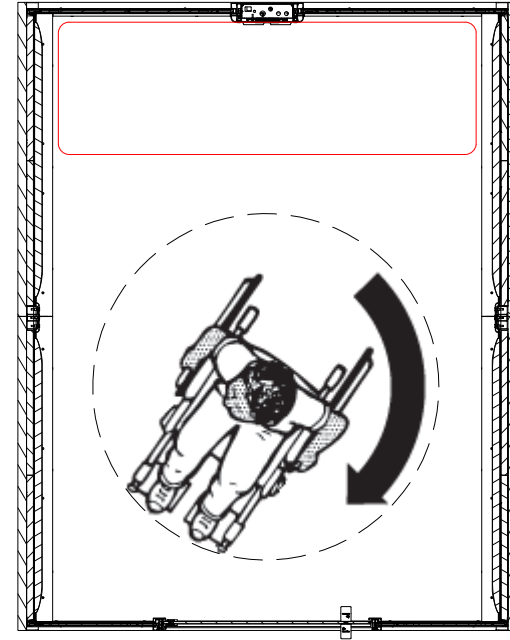



ADA COMPLIANCE

304.3.2 T-SHAPED SPACE

The turning space shall be a T-shaped space within a 60 in (1525 mm) square minimum with arms and base 36 in (915 mm) wide minimum. Each arm of the T shall be clear of obstructions 12 in (305 mm) minimum in each direction and the base shall be clear of obstructions 24 in (610 mm) minimum. The space shall be permitted to include knee and toe clearance complying with 306 only at the end of either the base or one arm.

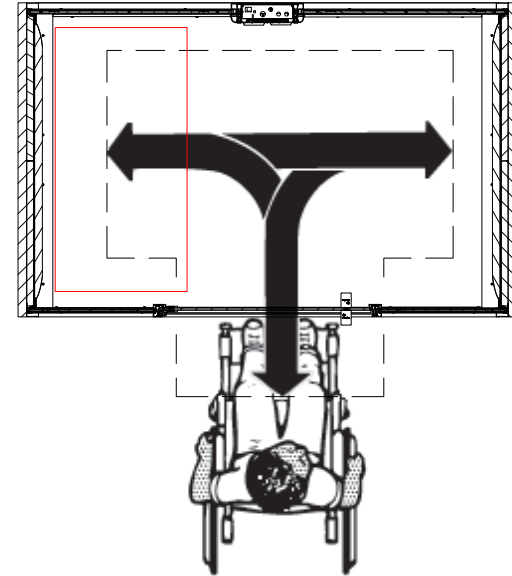

CIRCULAR AND T-SHAPED SPACE DIMENSIONING

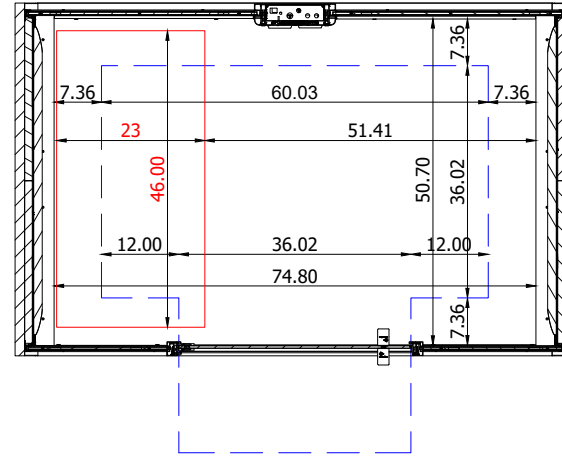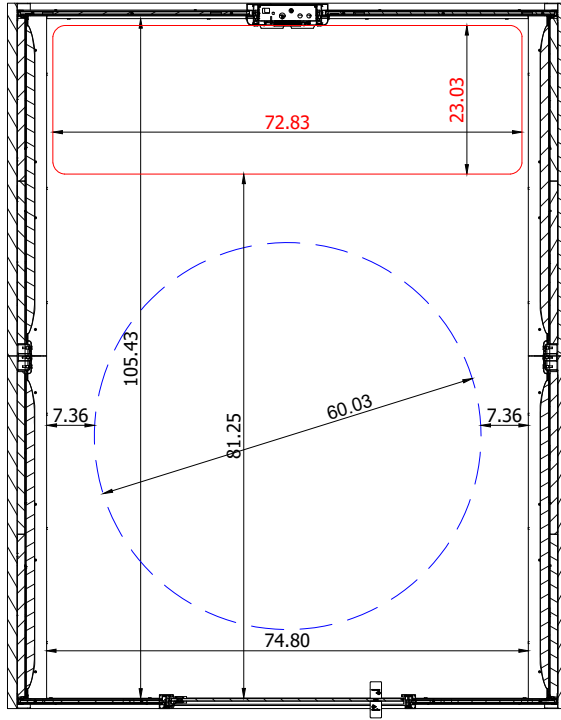

Only the empty hushFree.Access.M, without any equipment, is fully ADA compliant.



ADA COMPLIANCE

OPERABLE PARTS

Operable parts include light switches, electrical and communication receptacles, thermostats, alarm pulls, automatic door controls, and other elements used by facility occupants.

Requirements apply generally to all types of operable parts covered. They are also referenced by technical sections of the standards covering drinking fountains, faucet and flush controls, ATM and fare machines, appliances, storage, windows, and door and gate hardware, and other elements.

Operable parts must be usable with one hand and not require: tight grasping, pinching, or twisting of the wrist, or more than 5 pounds of force (lbf) to operate.

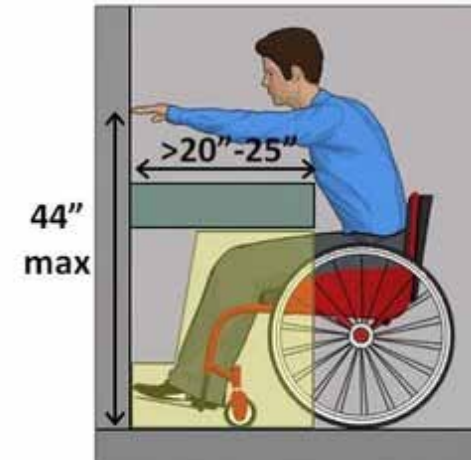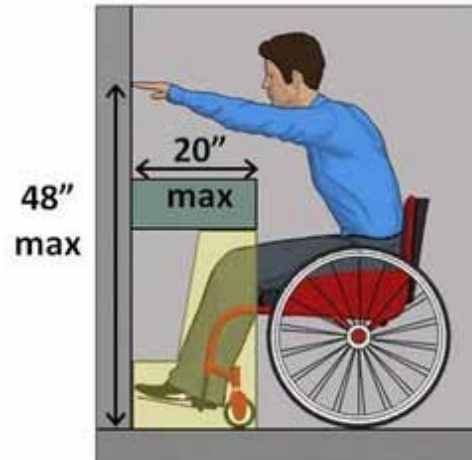

ADA COMPLIANCE

HANDLES, PULLS, AND KNOBS

Standard U-shaped pulls and lever-shaped handles are acceptable. Stationary knobs with a shape that can be loosely gripped also are acceptable. Knobs that require a full hand grip and turning, including round door knobs and shower controls, do not comply because they require twisting of the wrist.



ADA COMPLIANCE

CONTROLS AND SWITCHES


Dials and other controls that can be turned with the fingers but not the full hand can be used if they do not require twisting of the wrist or pinching. Flip switches and similar controls are acceptable, though push plate types can provide easier access.

Touch controls can be ADA compliant and the basics are:

- all screens must have a non-glare finish and 70% contrast between the background and the actual lettering in the on-screen messages.
- any on-screen characters must have 70% contrast from the background and be at least 3/16 of an inch high.
- the text should contrast well against the background, ideally with a color ratio of 3:1.
- for maximum readability, Digital displays should use ADA-approved fonts such as Times New Roman, Helvetica, and Calibri.
- the ADA recommended size range for text height is 5/8 – 2 inches.
- rapidly changing or flashing elements should be avoided.




NEW HUSHFREE DETAILS

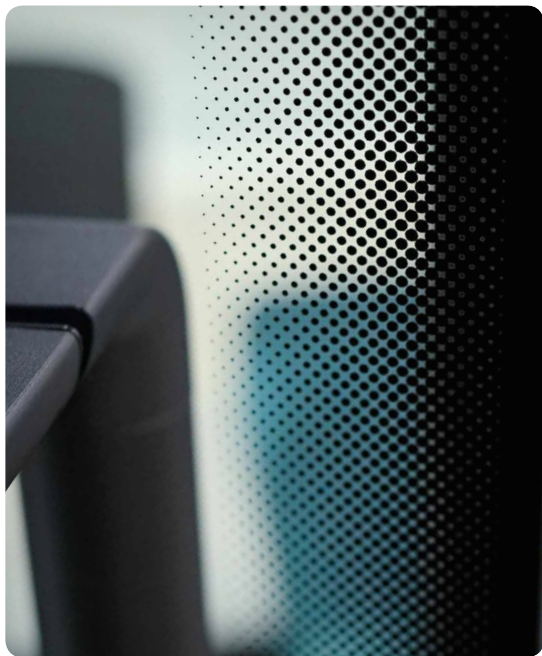

New Anti-collision



New handle

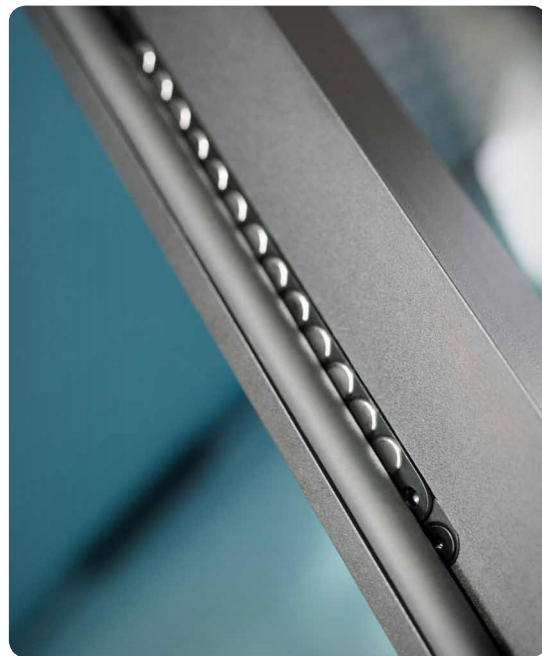

Doors with magnetic closure

HUSHFREE STATEMENT OF LINE



hushfree.XS

new



hushfree.S



hushfree.S.Hybrid

new



hushfree.XM

new



hushfree.M



hushfree.L



hushfree.access.M



hushfree.access.L

feel
free

to **talk** to **meet** to **work**

hushfree.XS



hushoffice



TECHNICAL SPECIFICATIONS

hushfree.XS

- **speech reduction**
measured in accordance with the ISO 23351:2020 standard
Class A
- **total airflow:** 2 fans with a maximum airflow 94 CFM.
Total air exchange 33 seconds, 44 l/s.
- **LED lighting** with a chromatic temperature of 4000 K and 500 lux
at table top level
- **prepared for sprinkler and alarm system connection**
- **dimensions:**
41.61 inches - width
35.43 inches - depth (including handle)
90.55 inches - height (including fan housing)
- **left-handed only**
- **net weight:** +/- 644 lbs



STANDARD EQUIPMENT

hushfree.XS



TABLE TOP

Table top dimensions:
29.52 x 13.55 in, with a fixed height of 41.30 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load – 55 lbs.



HUSHASSISTANT

Innovative booth managing system with a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust lighting settings. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.




HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.

OPTIONAL EQUIPMENT

hushfree.XS

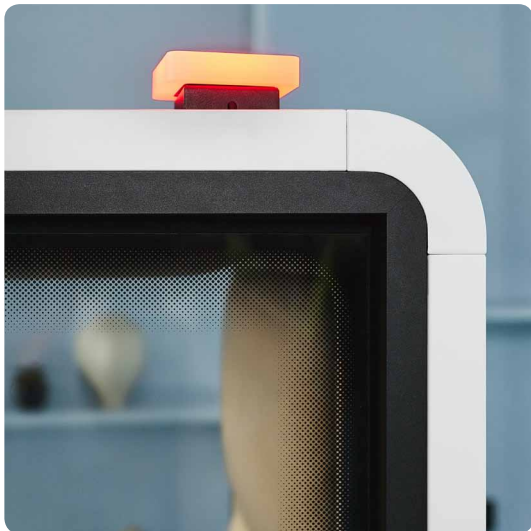

HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

feel
free

to **talk** to **meet** to **work**

hushfree.S.Hybrid



hushoffice



TECHNICAL SPECIFICATIONS


hushfree.S.Hybrid

- **speech reduction**
measured in accordance with the ISO 23351:2020 standard
Class A
- **total airflow:** 2 fans with a maximum airflow 94 CFM.
Total air exchange 39 seconds, 44 l/s.
- **LED lighting** with a chromatic temperature of 4000K
(adjusted in the range of 2200-6500K) and 500 lux at table top
- **prepared for sprinkler and alarm system connection**
- **dimensions:**
48.97 inches - width
35.43 inches - depth (including handle)
90.53 inches - height (including fan housing)
- **left-handed only**
- **net weight:** +/- 822 lbs




STANDARD EQUIPMENT

hushfree.S.Hybrid

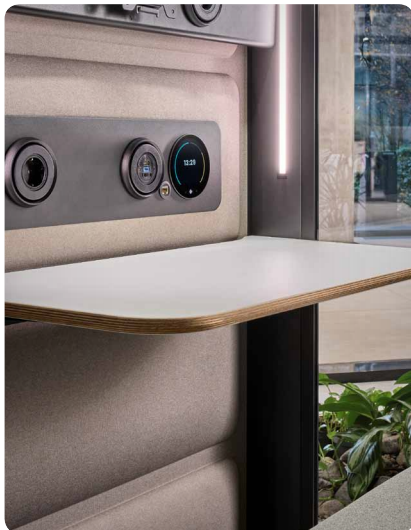

FIXED TABLE TOP

Table top dimensions: 30.39 x 15.94 in, with a fixed height of 28.85 in. The table top is made of plywood. 0.70 in thick. Non-fingerprint laminate on both sides. Maximum load – 55 lbs.

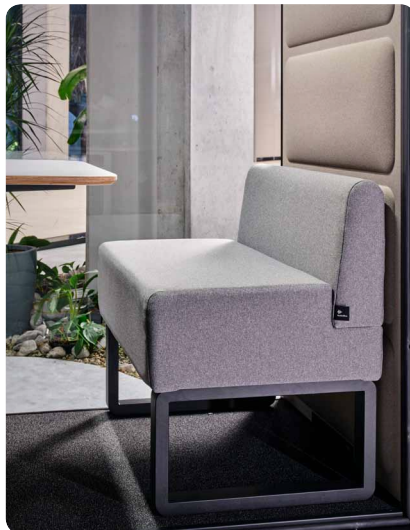

HUSHSOFA.SMALL

Single free-standing sofa made of the Athlon fabric, in the same as acoustic panels colours. The sofa is available in uniform colour or in a combination of any colour of the seat with a light or dark grey backrest. Maximum load 330 lbs.



HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.



HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.


OPTIONAL EQUIPMENT

hushfree.S.Hybrid



HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

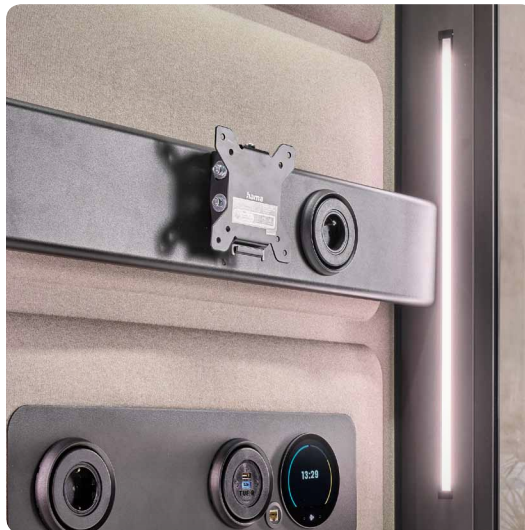

HUSHSCREEN.SET.HYBRID

Screen mounting kit including a VESA mount (2.95 x 2.95; 3.93 x 3.93 in) and an additional power socket for connecting the 27" screen.

feel
free

to **talk** to **meet** to **work**

hushfree.S



hushoffice




TECHNICAL SPECIFICATIONS

hushfree.S

- **Speech reduction**
measured in accordance with the ISO 23351:2020 standard
Class A
- **total airflow:** 2 fans with a maximum airflow 82 CFM.
Total air exchange 39 seconds, 44 l/s.
- **LED lighting** with a chromatic temperature of 4000 K and 500 lux
(adjusted in the range of 2200-6500K) and 500 lux at table top
- **prepared for sprinkler and alarm system connection**
- **dimensions:**
48.97 inches - width
35.43 inches - depth (including handle)
90.52 inches - height (including fan housing)
- **left-handed only**
- **net weight:** ~ 752 lbs




STANDARD EQUIPMENT

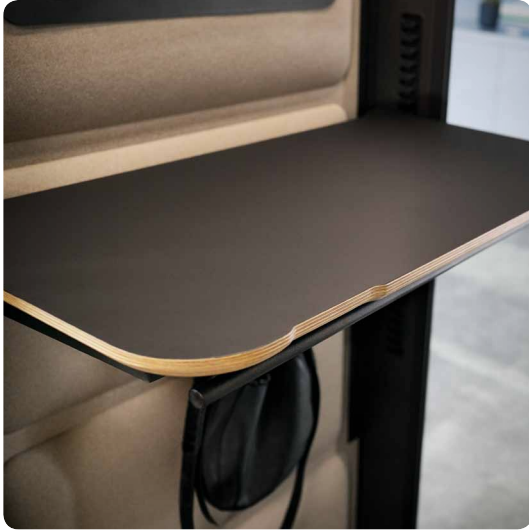

SIT&STAND DESK

Table top dimensions: 30.39 x 15.94 in, with height adjustment from 25.59 to 46.85 in. The table top is made of plywood. 0.70 in thick. Non-fingerprint laminate on both sides. Maximum load – 33 lbs.

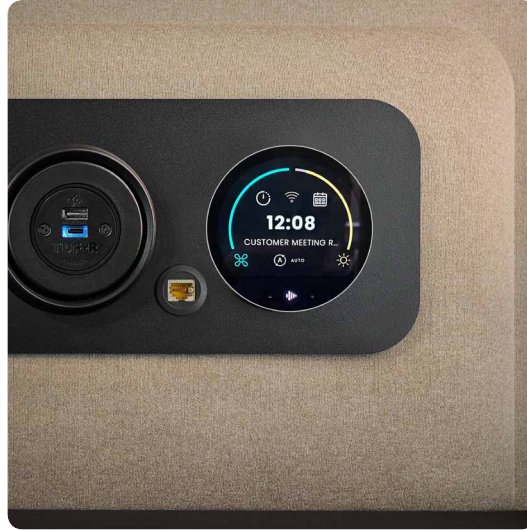

HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.

hushfree.S

OPTIONAL EQUIPMENT



HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

CAN I ADD THE SOFA TO HUSHFREE.S?

Yes – but the sofa need to be bought separately as hushFree.Accessories.

It should be remembered that hushFree.S is equipped with a height-adjustable sit&stand top as standard. When equipping the solution with a sofa, the height of the top should be adjusted to the sitting position. The electrification panel, as well as access points and hushAssistant, thus regulating the intensity of lighting and ventilation efficiency, remain at the height recommended for the standing position.

Due to the user's ergonomics and entry into the product, a sofa with a right armrest should be chosen.



feel
free

to **talk** to **meet** to **work**

hushfree.XM



hushoffice



TECHNICAL SPECIFICATIONS


hushfree.XM

- **Speech level reduction**
measured in accordance with the ISO 23351:2020 standard
Class B
- **total airflow:** 4 fans with a maximum airflow 188 CFM.
Total air exchange 37 seconds, 88 l/s.
- **LED lighting** with a chromatic temperature of 4000K (adjusted in the range of 2200-6500K) and an intensity of 500 lux at table top
- **prepared for sprinkler and alarm system connection**
- **booth dimensions:**
87.00 inches - width
54.72 inches - depth (including handle)
90.55 inches - height (including fan housing)
- **Left / Right-handed - option to be chosen at the installation stage**
- **net weight:** ~ 1104.5 lbs



STANDARD EQUIPMENT

hushfree.XM

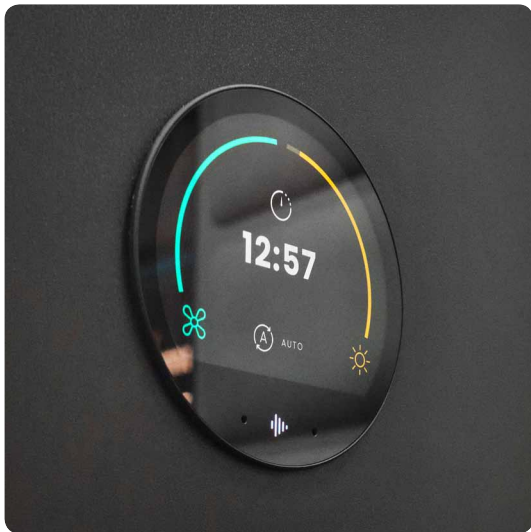

HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.




HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.


OPTIONAL EQUIPMENT

hushfree.XM

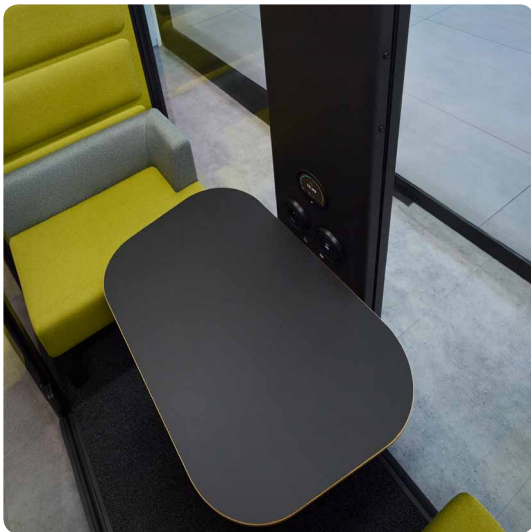

HUSHTABLE.XM

Table dimensions: 30.27 x 20.07 x 28.97 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load - 55 lbs.

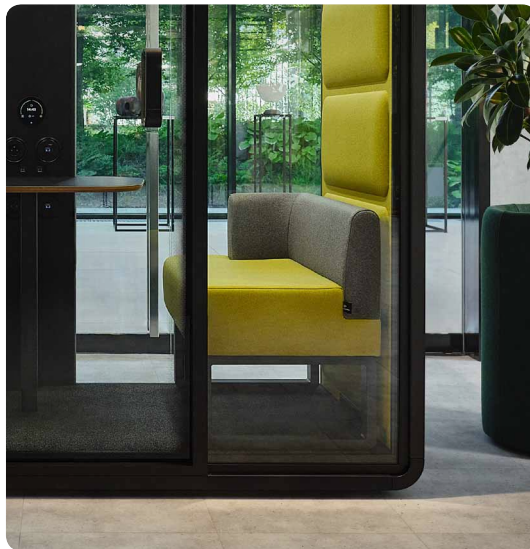

HUSHSOFA.SMALL.RH/LH

Sofas made of the same material as the acoustic panels are available in the same colours. The sofas are available in uniform colour or in a combination of any colour of the seat with a light or dark grey backrest. Maximum load - 330 lbs.



HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

feel
free

to **talk** to **meet** to **work**

hushfree.M



hushoffice



TECHNICAL SPECIFICATIONS

hushfree.M

- **Speech level reduction**
measured in accordance with the ISO 23351:2020 standard
Class A
- **total airflow:** 4 fans with a maximum airflow 188 CFM.
Total air exchange 60 seconds, 88 l/s.
- **LED lighting** with a chromatic temperature of 4000 K
(adjusted in the range of 2200-6500K) and an intensity of 500 lux
at table top
- **prepared for sprinkler and alarm system connection**
- **booth dimensions:**
87.00 inches - width
54.72 inches - depth (including handle)
90.55 inches - height (including fan housing)
- **Left / Right-handed - option to be chosen at the installation stage**
- **net weight:** ~ 1291 lbs



STANDARD EQUIPMENT

hushfree.M



HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.



HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.


OPTIONAL EQUIPMENT

hushfree.M



HUSHTABLE.M

Table dimensions: 30.19 x 32.95 x 28.93 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load – 55 lbs.

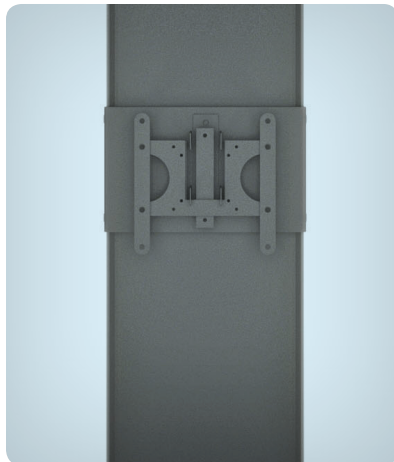


HUSHSCREEN.SET

The TV bracket allows the TV to be suspended from the central column.
The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of / 2.95 x 2.95 in - 7.9 x 7.9 in and a maximum weight of 49.60 lbs.



HUSHSOFA.MEDIUM.RH/LH

The sofas are available in the same colours as the acoustic panels - they are made from the same fabrics.
The sofas are available in a single colour or in a combination of any seat colour with a light or dark grey back.
Maximum load on the sofa – 600 lbs.

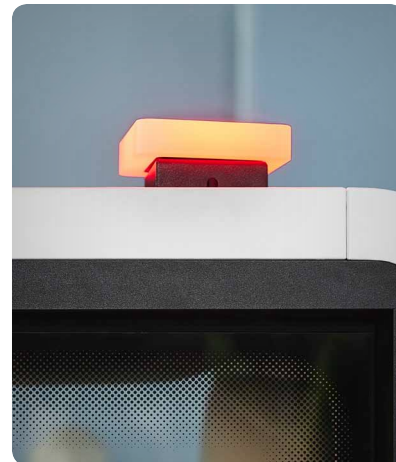

HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

feel
free

to **talk** to **meet** to **work**

hushfree.L




hushoffice



TECHNICAL SPECIFICATIONS

hushfree.L

- **Speech level reduction**
measured in accordance with the ISO 23351:2020 standard
Class A
- **total airflow:** 8 fans with a maximum airflow 377 CFM.
Total air exchange 62 seconds, 176 l/s.
- **LED lighting** with a chromatic temperature of 4000 K
(adjusted in the range of 2200-6500K) and an intensity of 500 lux
at table top
- **prepared for sprinkler and alarm system connection**
- **booth dimensions:**
86.92 inches - width
109.44 inches - depth (including handle)
90.55 inches - height (including fan housing)
- **Left / Right-handed - option to be chosen at the installation stage**
- **net weight:** ~ 2092 lbs

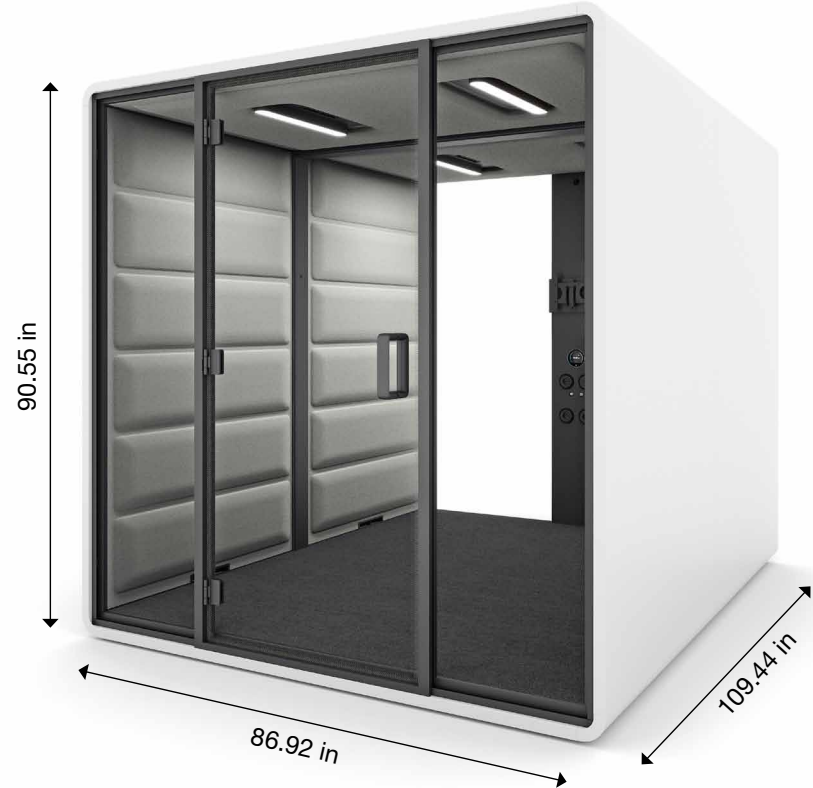

STANDARD EQUIPMENT

hushfree.L



HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.




HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.


OPTIONAL EQUIPMENT

hushfree.L

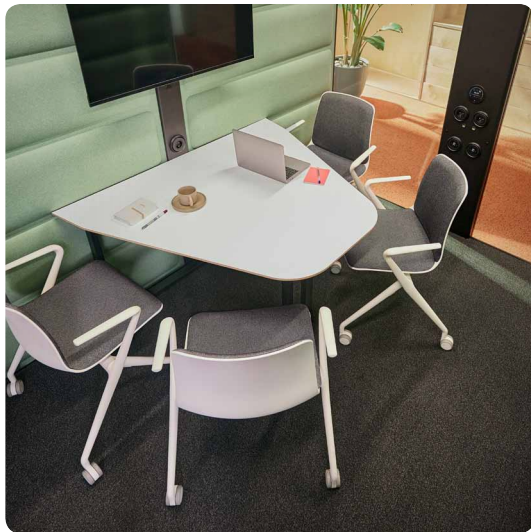


HUSHCONFERCETABLE.L

Table dimensions: 51 x 43 x 29 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load - 55 lbs.

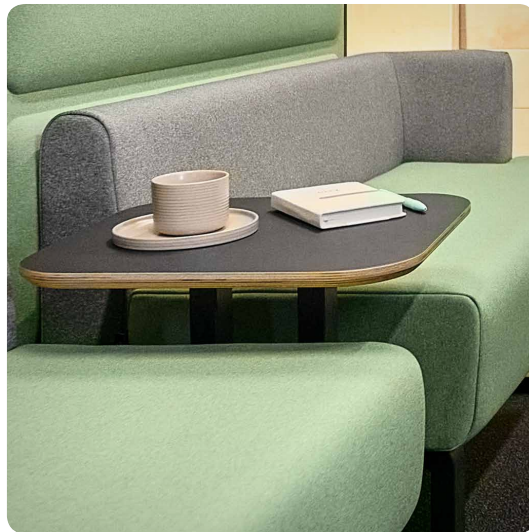

HUSHCOFFEETABLE .L

Table measuring: 15 x 16 x 22 inches.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load - 11 lbs.

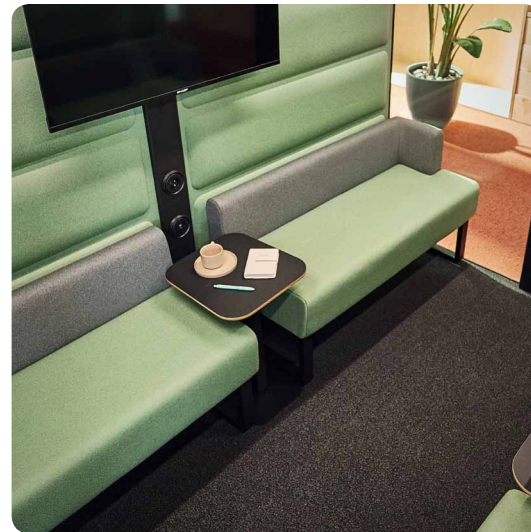

HUSHSOFA.MEDIUM.RH/LH

The sofas are available in the same colours as the acoustic panels - they are made from the same fabrics.
The sofas are available in a single colour or in a combination of any seat colour with a light or dark grey back.
Maximum load on the sofa - 600 lbs.

OPTIONAL EQUIPMENT

hushfree.L




HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.



HUSHSCREEN.SET*

The TV mounting bracket allows you to hang a TV on the central column.
The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of 2.95 x 2.95 inches - 7.9 x 7.9 inches and a maximum weight of 49.6 lbs.

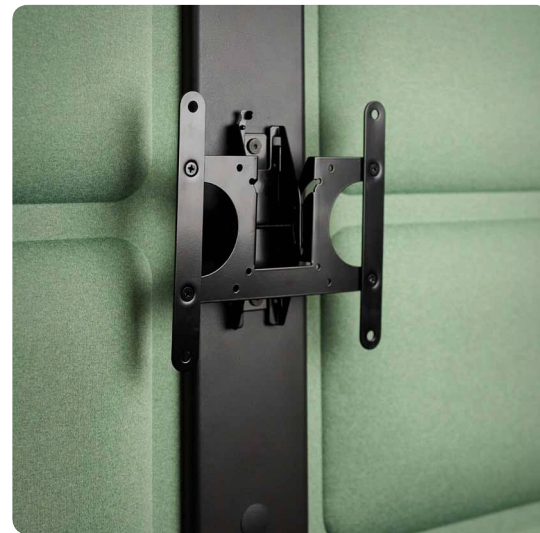


HUSHSCREEN.BRACKET*

The TV mounting bracket allows the TV to be suspended from a central column.
The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of 2.95 x 2.95 inches - 7.9 x 7.9 inches and a maximum weight of 49.6 lbs.

* product configuration possible with one type of TV bracket


WHY DID WE IMPLEMENT THE SIDE TABLE SETTING IN HUSHFREE.L

hushfree.L

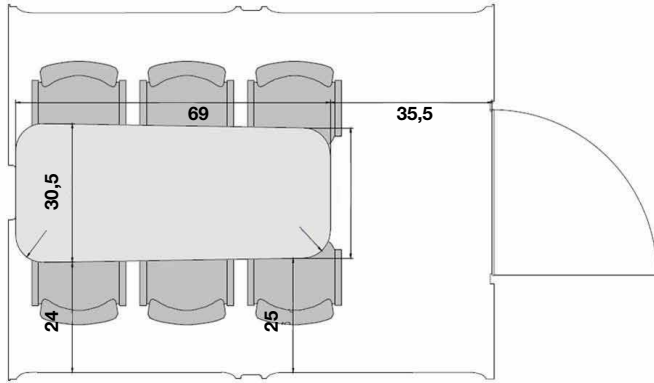

Dimensioning with the desirable table in a central position

- too little space for users to move back freely
- the user closest to the central column cannot see the screen because he is sitting sideways to it


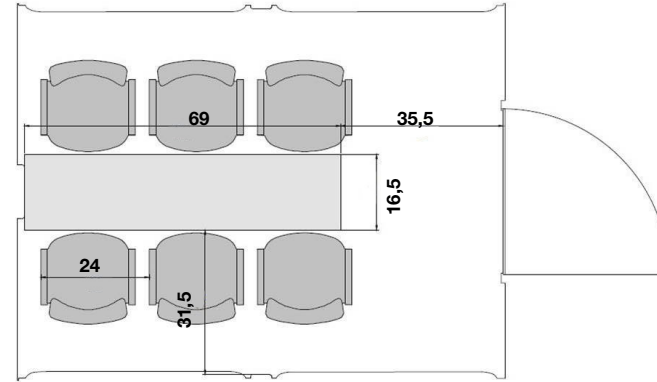


Dimensioning with a table to ensure better ergonomic comfort

- the table would have to be a maximum of 16.5 in depth
- too little working surface in front of the user - a small laptop is about 9 in deep
- the user sitting closest to the central column will always be in a less comfortable situation when looking at the screen

WHY DID WE IMPLEMENT THE SIDE TABLE SETTING IN HUSHFREE.L

hushfree.L

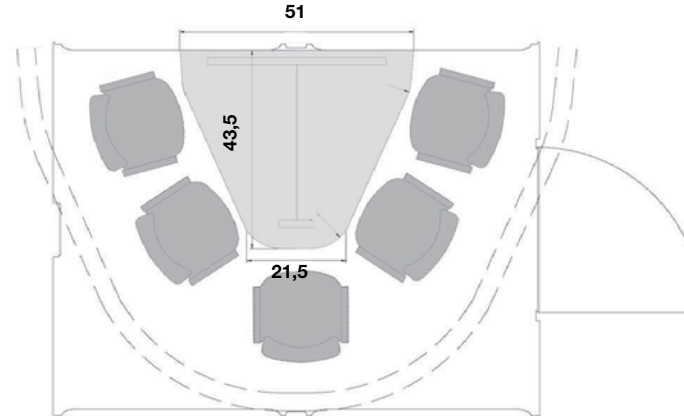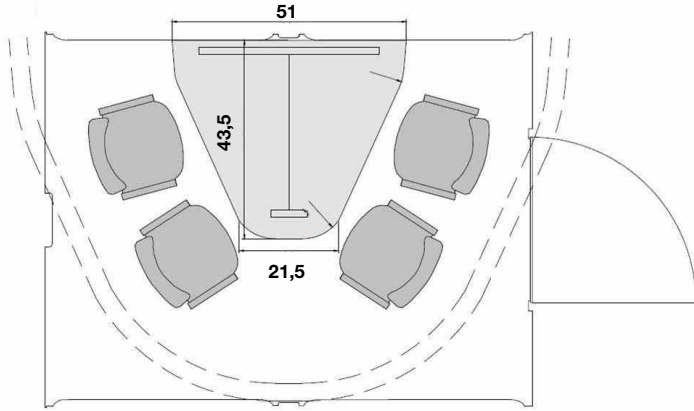

Dimensioning with the table in side orientation

- more space in the pod itself
- allows to turn the chairs so that each user can look at the screen more comfortably
- at the expense of the number of users, the comfort of using the worktop and TV screen is achieved
- user safety in the event of threats and the need to suddenly leave the product

Please be aware that hushAccess.L is 16 in wider than hushFree.L, so the number of users, space ergonomics, and table arrangement do not have a one-to-one ratio.

feel
free

to **talk** to **meet** to **work**

hushfree.access.M



hushoffice



TECHNICAL SPECIFICATIONS



hushfree.access.M

- **Speech level reduction**
measured in accordance with the ISO 23351:2020 standard
Class B
- **total airflow:** 4 fans with a maximum airflow 188 CFM.
Total air exchange 63 seconds, 88 l/s.
- **LED lighting** with a chromatic temperature of 4000 K
and an intensity of 500 lux at desk level, adjusted in the range
of 2200 - 6500K
- **prepared for sprinkler and alarm system connection**
- **booth dimensions:**
87.00 inches - width
54.72 inches - depth (including handle)
89.41 inches - height (including fan housing)
- **Left / Right-handed - option to be chosen at ordering stage**
- **net weight:** ~ 1167 lbs



STANDARD EQUIPMENT



hushfree.access.M



HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.



HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.

OPTIONAL EQUIPMENT




hushfree.access.M



HUSHTABLE.M

Table dimensions: 30.19 x 32.95 x 28.93 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load – 55 lbs.

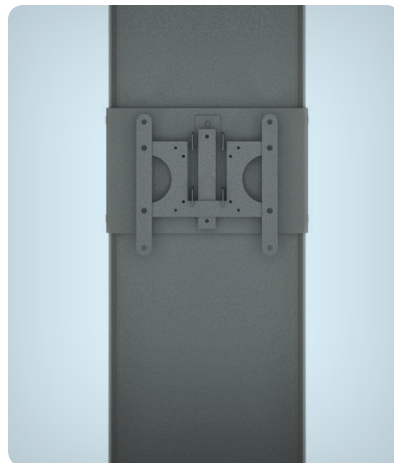


HUSHSCREEN.SET

The TV bracket allows the TV to be suspended from the central column.
The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of / 2.95 x 2.95 in - 7.9 x 7.9 in and a maximum weight of 49.60 lbs.



HUSHSOFA.MEDIUM.RH/LH

The sofas are available in the same colours as the acoustic panels - they are made from the same fabrics.
The sofas are available in a single colour or in a combination of any seat colour with a light or dark grey back.
Maximum load on the sofa – 600 lbs.

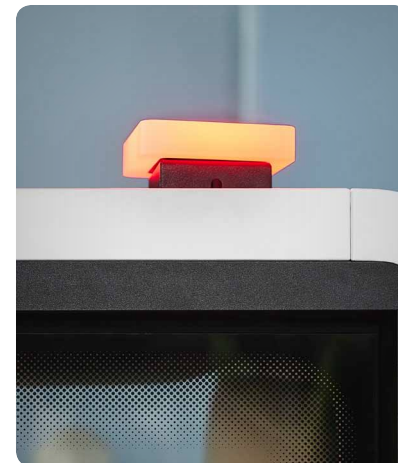

HUSHOCCUPANCY.SIGN

Activated by a motion sensor, signalling whether the pod is occupied during use.

feel
free

to **talk** to **meet** to **work**

hushfree.access.L



hushoffice




TECHNICAL SPECIFICATIONS



hushfree.access.L

- **Speech level reduction**
measured in accordance with the ISO 23351:2020 standard
Class B
- **total airflow:** 8 fans with a maximum airflow 377 CFM.
Total air exchange 65 seconds, 176 l/s.
- **LED lighting** with a chromatic temperature of 4000 K
and an intensity of 500 lux at table level, adjusted in the range
of 2200 - 6500K
- **prepared for sprinkler and alarm system connection**
- **booth dimensions:**
86.92 inches - width
109.44 inches - depth (including handle)
89.41 inches - height (including fan housing)
- **Left / Right-handed - option to be chosen at ordering stage**
- **net weight:** ~ 1763 lbs

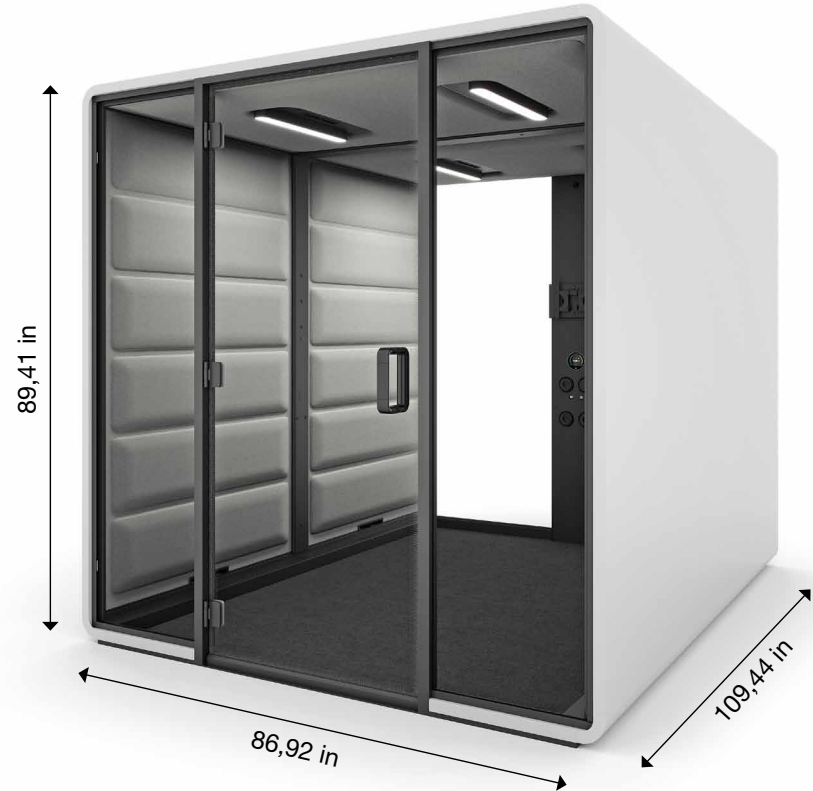

STANDARD EQUIPMENT



hushfree.access.L



HUSHASSISTANT

HushAssistant is a 4-inch round, high-resolution touchscreen lighting and ventilation controller. It allows users to manage and adjust their lighting and airflow settings. HushAssistant can adjust brightness, color and activate scenes (moods) for different needs. HushAssistant also provides airflow adjustments to improve air quality and energy efficiency. Part of HushAssistant's functionality is to manage and display meeting room availability.




HUSHDOOR.LIMITER

Door opening limiter to a maximum angle of 130°. Mounted on the lower and upper hinge (2 pieces). After mounting, the acoustic cabin door opens to a maximum angle of 130 degrees. Made of black EPDM material with a hardness of 50° ShA.

OPTIONAL EQUIPMENT




hushfree.access.L

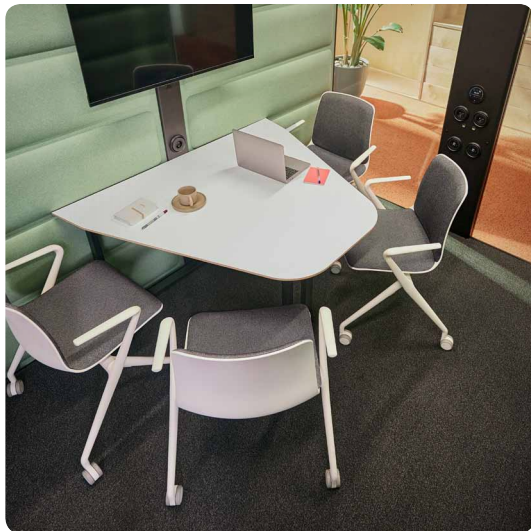

HUSHCONFERENCETABLE.ACCESS.L

Table dimensions: 51 x 43 x 29 in.
The table top is made of plywood. 0.70 in thick.
Non-fingerprint laminate on both sides.
Maximum load - 55 lbs.

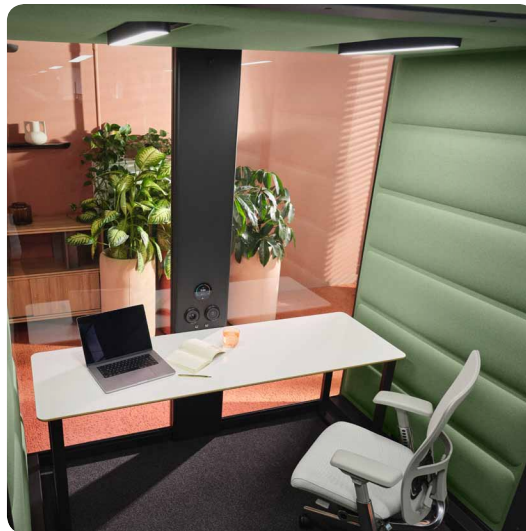

HUSHDESK.ACCESS.L

Table dimensions: 72.83 x 23.03 x 28.93 in.
The tabletop is made of plywood. 0.7 in thick.
Non-fingerprint laminate on both sides.
Maximum load - 55 lbs.

OPTIONAL EQUIPMENT



hushfree.access.L



HUSHOCCUPANCY.SIGN


Activated by a motion sensor, signalling whether the pod is occupied during use.



HUSHSCREEN.SET*

The TV mounting bracket allows you to hang a TV on the central column.

The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of 2.95 x 2.95 inches - 7.9 x 7.9 inches and a maximum weight of 49.6 lbs.

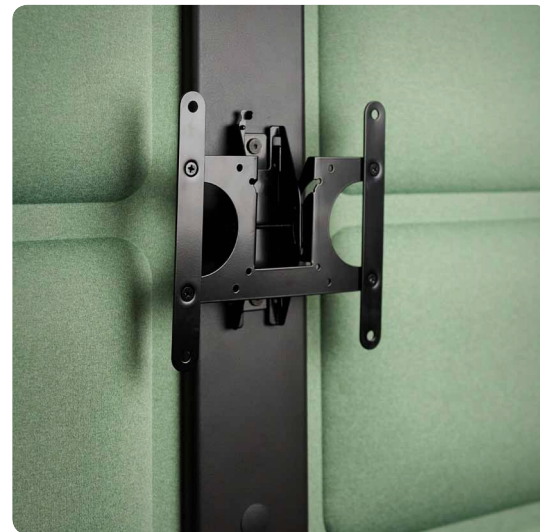

HUSHSCREEN.BRACKET*

The TV mounting bracket allows the TV to be suspended from a central column.


The bracket is based on the VESA standard and allows the installation of screens with a mounting hole spacing of 2.95 x 2.95 inches - 7.9 x 7.9 inches and a maximum weight of 49.6 lbs.

* product configuration possible with one type of TV bracket

CAN I ADD THE SOFA AND COFFE TABLE
TO HUSHFREEACCESS.L?

**Yes – but those need to be bought separately as
hushFree.Accessories.**

Due to the metal construction ventilation duct cover,
adding a sofa to access units will always be a small
gap (approx 2 inches) between the side panel and the
backrest. The clear floor space will also be reduced
compared to regular hushFree.L.

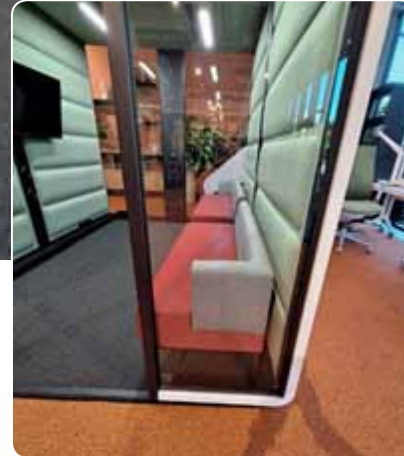

CONFIGURE YOUR BOOTH AS YOU WISH

Case




ABB white



AGC cosmos grey

Glass



PRZ transparent




MGA frosted


Fabric Athlon Plus / Athlon **Gabriel**



60140 light grey



60167 dark grey



61194 beige



63115 orange



64247 red



66228 blue



68252 yellow



68255 light green

Metal elements and frame



JGC cosmos grey



CONFIGURE YOUR BOOTH AS YOU WISH

Top (hushFree.XS)



ABB white



AGA velvet black

Top (hushFree.S)



ABB white



AGA velvet black

Top (hushFree.S.Hybrid)



ABB white



AGA velvet black

Top (hushFree.M, hushFree.XM, hushFree.Access.M)



ABB white



AGA velvet black

Desk Top (hushFree.Access.L)



ABB white



AGA velvet black

Top (hushFree.L, hushFree.Access.L)



ABB white



AGA velvet black

Top (hushFree.L)



ABB white



AGA velvet black



Hushoffice portfolio overview

1 person acoustic pod overview



Dimensions & Weight	Hushoffice hushFree.XS	Hushoffice hushFree.S	Hushoffice hushFree.S.Hybrid	Hushoffice hushPhone	Hushoffice hushHybrid
Width (external/internal)	41.61 / 35.43 in	48.97 / 38.90 in	48.97 / 38.90 in	41.33 / 32.28 in	48.97 / 39.37 in
Height (external/internal)	90.55 / 80.08 in	90.53 / 80.06 in	90.53 / 80.06 in	87.79 / 79.92 in	88.22 / 79.88 in
Depth (external/internal)	35.43 / 31.73 in	35.43 / 31.74 in	35.43 / 31.74 in	35.43 / 32.55 in	35.43 / 31.88 in
Doorway	35.43 in	35.43 in	35.43 in	36.33 in	36.89 in
Unit Weight	644 lbs	752 lbs	822 lbs	745 lbs	798 lbs
Product features					
Control panel	HushAssistant	HushAssistant	HushAssistant	Manual knobs	Manual knobs
Door orientation	Left-handed only (mirror version on demand)	Left-handed only (mirror version on demand)	Left-handed only (mirror version on demand)	Left / Right-handed option to be chosen at the installation stage	Right-handed only (mirror version on demand)
Furniture / Options	Fixed table top W: 29.52 x D: 13.55 x H: 41.30 in	Height adjustable table W: 30.39 x D: 15.94 x H: 25.59 - 46.85 in	Fixed table top W: 30.39 x D: 15.94 x H: 28.85 in	Foldable laptop table W: 18.42 x D: 12.99 in Ergonomic rear shelf W: 32.28 x D: 6.06 - 8.42 x H: 10.86 in	Depth adjustable table top W: 31.88 x D: 15.78 - 17.32 H: 28.93 in
	--	--	Freestanding sofa	Optional: height adjustable stool (H: 24.8 - 34.6 in)	Integrated sofa
	--	--	Optional: screen set bracket	--	--
	Optional: booth occupied indicator	Optional: booth occupied indicator	Optional: booth occupied indicator	--	--
Electrification	1x 110V	2x 110V	2x 110V	1x 110V	1x 110V
	Optional: 1x USB A + 1x USB C	Optional: 1x USB A + 1x USB C	Optional: 1x USB A + 1x USB C	1x USB A + 1x USB C	1x USB A + 1x USB C
	--	1x RJ45	1x RJ45	--	1x RJ45
Ventilation	2 fans – user adjustable	2 fans – user adjustable	2 fans – user adjustable	2 fans – auto adjust	2 fans – user adjustable
	44 l/sec (air change inside every 33 sec)	44 l/sec (air change inside every 39 sec)*	44 l/sec (air change inside every 39 sec)	61 l/sec (air change inside every 80 sec)	67 l/sec (air change inside every 90 sec)
Acoustics according to ISO 23351-1:2020	30.3 dB (Class A)	30.2 dB (Class A)	30.2 dB (Class A)	24.7 dB (Class C)	25.6 dB (Class B)
Lighting	Integrated 2x 12W LED Ceiling light (1000 lm, 4000K)	Integrated 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 2.5W LED Ceiling light (160 lm, 4000K)	Integrated 6.4W LED Ceiling light (150 lm, 4000K)
	Integrated 2x 2W LED Side strips (4000K)	Integrated 2x 3.5W LED Side strips (adjustable, 4000K)	Integrated 2x 3.5W LED Side strips (adjustable, 4000K)	--	Integrated 2x 2.4W LED Side strips (adjustable, 4000K)
Seismic anchorage	Standard	Standard	Standard	Standard	Standard
Movability	Integrated castors as standard	Integrated castors as standard	Integrated castors as standard	Integrated castors as standard	Integrated castors as standard
Assembly time / Number of installers	2-3h / 2 persons	2-3h / 2 persons	2-3h / 2 persons	2-3h / 2 persons	2-3h / 2 persons
Certifications					
Designed purpose					
	Acoustic pod perfect for quick phone and video calls.	Acoustic pod perfect for individual work, longer video conferences and phone calls.	Acoustic pod perfect for longer individual work, video conferences, online meetings, and presentations.	Still the perfect solution for quick phone calls or private moments.	Still an unmatched solution for video conferences with integrated sofa providing great comfort.



2-4 people acoustic pod overview



Dimensions & Weight	Hushoffice hushFree.XM	Hushoffice hushFree.M	Hushoffice hushFree.Access.M	Hushoffice hushMeet
Width (external/internal)	86.93 / 78.48 in	87.00 / 78.48 in	87.00 / 78.48 in	84.64 / 75.03 in
Height (external/internal)	90.55 / 79.99 in	90.55 / 80.07 in	89.41 / 83.96 in	88.26 / 79.72 in
Depth (external/internal)	35.43 / 29.52 in	54.72 / 48.42 in	54.72 / 50.55 in	54.72 / 52.08 in
Doorway	35.43 in	35.43 in	35.43 in	33.38 in
Unit Weight	1104.5 lbs	1291 lbs	1167 lbs	1410 lbs
Product features				
Control panel	HushAssistant	HushAssistant	HushAssistant	Manual knobs
Door orientation	Left-handed only (mirror version on demand)	Left-handed only (mirror version on demand)	Left-handed only (mirror version on demand)	Left / Right-handed option to be chosen at the installation stage
Furniture / Options	Optional: Table W: 30.27 x D: 20.07 x H: 28.97 in.	Optional: Table W: 30.19 x D: 32.95 x H: 28.93 in.	Optional: Table W: 30.19 x D: 32.95 x H: 28.93 in.	Table W: 30.31 x D: 39.37 x H: 28.93 in
	Optional: 2 freestanding sofas	Optional: 2 freestanding sofas	Optional: 2 freestanding sofas	Integrated sofas
	--	Optional: central screen set bracket	Optional: central screen set bracket	--
	Optional: booth occupied indicator	Optional: booth occupied indicator	Optional: booth occupied indicator	--
Electrification	2x 110V	2x 110V	2x 110V	1 x 110V
	Optional: USB A + USB C	Optional: USB A + USB C / HDMI	Optional: USB A + USB C / HDMI	1 x USB A + 1 x USB C
	2x RJ45	2x RJ45	2x RJ45	1 x RJ45
Ventilation	4 fans – user adjustable	4 fans – user adjustable	4 fans – user adjustable	6 fans – user adjustable
	88 l/sec (air change inside every 37 sec)	88 l/sec (air change inside every 60 sec)*	88 l/sec (air change inside every 63 sec)	97 l/sec (air change inside every 167 sec)
Acoustics according to ISO 23351-1:2020	28.7 dB (Class B)	30.2 dB (Class A)	26.4 dB (Class B)	28.5 dB (Class B)
Lighting	Integrated 2x 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 2x 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 2x 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 19.2W LED Ceiling light (adjustable up to 1940 lm, 3000K)
Seismic anchorage	Standard	Standard	Standard	Standard
Movability	Integrated castors as standard	Integrated castors as standard	--	Integrated castors as standard
Assembly time / Number of installers	3-4h / 2 persons	3-4h / 4 persons	3-4h / 4 persons	3-4h / 2 persons
Certifications				
Designed purpose				
	Acoustic pod perfect for formal and informal meetings for 1-2 people	Acoustic pod perfect for formal and informal meetings for 1-4 people	Acoustic pod perfect for formal and informal meetings for 1-4 people, with easy wheelchair access.	Generously sized and dependable solution for meetings. Perfect for busy offices.



4+ people acoustic pod overview



Dimensions & Weight	Hushoffice hushFree.L	Hushoffice hushFree.Access.L	Hushoffice hushAccess.L
Width (external/internal)	86.92 / 78.48 in	86.92 / 78.48 in	102.36 / 93.38 in
Height (external/internal)	90.55 / 80.07 in	89.41 / 83.96 in	87.20 / 82.48 in
Depth (external/internal)	109.44 / 106.29 in	109.44 / 104.24 in	106.29 / 103.15 in
Doorway	35.43 in	35.43 in	37.16 in
Unit Weight	2092 lbs	1763 lbs	1825 lbs
Product features			
Control panel	HushAssistant	HushAssistant	Manual knobs
Door orientation	Left / Right-handed option to be chosen at the installation stage	Left/Right-handed option to be chosen at the ordering stage	Right-handed only (mirror version on demand)
Furniture / Options	Optional: Conference table W: 51.18 x D: 43.22 x H: 28.93 in	Optional: Conference table W: 51.18 x D: 43.22 x H: 28.93 in	Optional Conference table W: 47.24 x D: 43.30 x H: 29.52 in
	Optional: Coffee tables W: 15.09 x D: 16.47 x H: 22.26 in	Optional: Desk W: 72.83 x D: 23.03 x H: 29.21 in	--
	Optional: 2 or 4 freestanding sofas	--	--
	Optional: central screen set bracket or side Vesa bracket	Optional: central screen set bracket or side Vesa bracket	Optional: cablepass for screen installation
	Optional: booth occupied indicator	Optional: booth occupied indicator	--
Electrification	2x 110V	2x 110V	2 x 110V
	Optional: USB A + USB C / HDMI / LAN	Optional: USB A + USB C / HDMI / LAN	2 x USB A + 2 x USB C
	--	--	Optional:worktop power module 3x 110V
	2x RJ45	2x RJ45	2 x RJ45
Ventilation	8 fans – user adjustable	8 fans – user adjustable	12 fans – user adjustable
	176 l/sec (air change inside every 62 sec)	176 l/sec (air change inside every 65 sec)	116 l/sec (air change inside every 231 sec)
Acoustics according to ISO 23351-1:2020	30.2 dB (Class A)	28 dB (Class B)	20.5 dB (Class C)
Lighting	Integrated 4x 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 4x 20W LED Ceiling light (adjustable up to 2300 lm, 2200 - 6500K)	Integrated 41.4W LED Ceiling light (adjustable up to 4200 lm, 3000K)
Seismic anchorage	Standard	Standard	Standard
Movability	Integrated castors as standard	--	--
Assembly time / Number of installers	5-6h / 4 persons	5-6h / 4 persons	5-6h / 4 persons
Certifications			
	      	      	  
Designed purpose			
	Acoustic pod perfect for formal and informal meetings for 1-2 people	Acoustic pod perfect for formal and informal meetings for 1-4 people	Acoustic pod perfect for formal and informal meetings for 1-4 people, with easy wheelchair access.

THE KEY TAKEAWAYS OF THE NEW HUSHFREE RANGE

1

Even **better acoustics:** meaning that the pods are suitable for more confidential conversations or use in quieter areas

2

Complete freedom to use the pod for many applications: using own furniture, easy to specify electronics, freedom to choose colours, etc.

3

Moveability: our HushFree pods, except Access models, are always able to be repositioned to ensure the best utilisation in the office

4

Extensively tested: hushFree line is not only UL compliant, but it meets GreenGuard Gold and all relevant BIFMA and GS testing requirements

5

Technology agnostic: our hushAssistant tool is designed without proprietary technologies, they simply connect to existing booking tools and most importantly don't collect user information.

feel
free

to **talk** to **meet** to **work**



hushoffice